

制动, 支撑脚, 车轮, 牵引钩
BREAK, LEGS, WHEELS, DRAWBAR



1 ▶ 由有高级资质的锅炉生产技师打造的铝合金拖车
Aluminum alloy trailer manufactured by a highly qualified boilermaker technician

2 ▶ 手动操作稳定拖车用的支撑脚, 安全可靠
Manually stabilizing legs keeping the trailer on the ground and offering a safety of use

3 ▶ 牵引杆配备标准的可调式牵引环
Draught beam with adjustable and standard towing ring

4 ▶ 可以按客户要求定制储物箱
Possibility of a custom-made storage box

5 ▶ 其它装备: 手动消防炮或遥控消防炮
Additional equipment: manual monitor or remote-controlled monitor

▶ 750 kg 最大轴荷, 轴桥制动方式 / Brake on axle tree from 750 kg
▶ 标准公路用信号车灯 / Standard road traffic signal
▶ 选配: 备用车轮 / Options: spare wheel

接口*

COUPLINGS*

*根据客户需求可配备不同型号接口
*Products can be equipped with other types of couplings if needed



PLA_01101_Flyer CH-EN_拖车炮_TowableUnits



POK CHINA

博克消防装备科技有限公司


地址: 北京市顺义区南彩镇彩达三街一号茂华工场5号厂房2层201室 · POK

电话: 010 64667868

邮箱: info@pokchina.com sales@pokchina.com

www.pokchina.com

拖车炮
TOWABLE UNITS

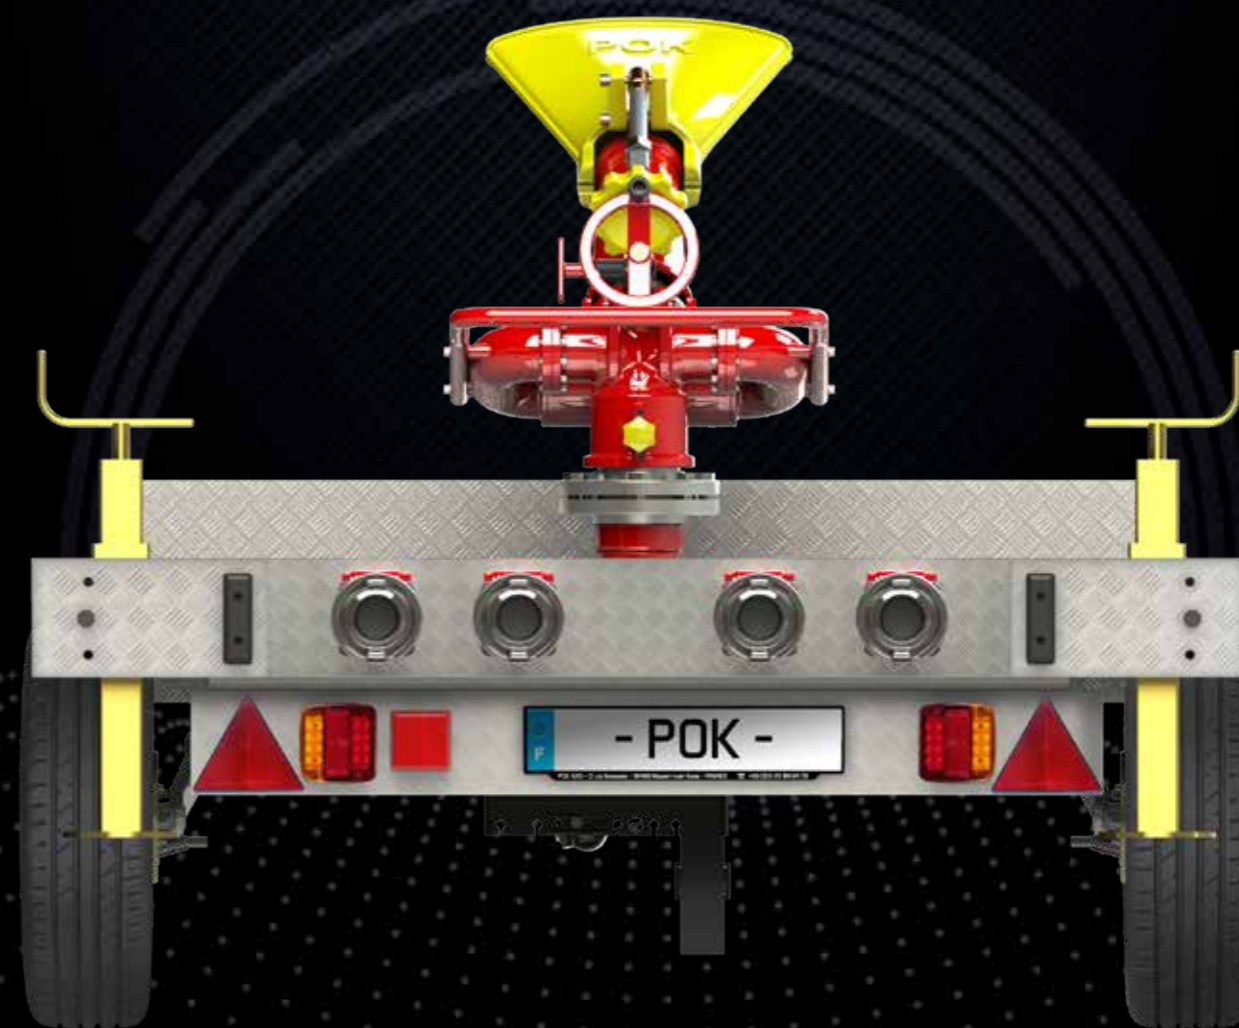

充满激情的创造者 / WE CREATE WITH PASSION



30000LPM 拖车炮 配备 DN200 消防炮 TRAILER TYPE "30000" WITH MONITOR DN200

- ▶ 流量：30000升/分 / Flow rate: 30000 lpm
- ▶ 入水口：需要明确直径Ø / Inlet: specify the Ø
- ▶ 最大轴荷：2x 1600 kg
Max. weight on axle tree: 2x 1600 kg
- ▶ 材料：铝合金和钢 / Material: aluminium alloy and steel
- ▶ 支撑脚类型：伸缩型
"Jockey" wheel type: retractable
- ▶ 信号灯型式：标准平板式
Road signal: standardised plate
- ▶ 压舱体积：1300 L / Ballast: 1300 L
- ▶ 支撑脚承重：4x 10t / Stands: 4x 10t
- ▶ 轴桥制动方式 / Brake on axle tree
- ▶ 驻车制动 / Park brake
- ▶ 选配：消防炮,出口装备,外廓尺寸,入水口数量
Options: monitor, outlet equipment, dimensions, number of inlets
- ▶ 冲洗 / Flush

TANK 2000 拖车炮 配备 LMP80 消防炮 TRAILER TYPE "TANK 2000L" WITH LMP80

- ▶ 流量：5000升/分 / Flow rate: 5000 lpm
- ▶ 入水口：需要明确直径Ø / Inlet: specify the Ø
- ▶ 材料：铝合金和钢 / Material: aluminium alloy and steel
- ▶ 最大轴荷：2x 1300kg / Max. weight on axle tree: 2x 1300kg
- ▶ 车轮规格：165 R14C / Wheels dimensions: 165 R14C
- ▶ 信号灯型式：标准平板式 / Road signal: standardised plate
- ▶ 选配：消防炮,出口装备,外廓尺寸,入水口数量
Options: monitor, outlet equipment, dimensions, number of inlets
- ▶ 支撑脚类型：伸缩型
"Jockey" wheel type: retractable with collar
- ▶ 支撑脚承重：4x 800kg / Stands: 4x 800kg
- ▶ 储物箱 / Storage box
- ▶ 轴桥制动方式 / Brake on axle tree
- ▶ 驻车制动 / Park brake
- ▶ 冲洗 / Flush



4000LPM 拖车炮 TRAILER TYPE "4000" WITH MINOTOR

- ▶ 流量：5000 L/min / Flow rate: 5000 lpm
- ▶ 入水口：需要明确直径Ø / Inlet: specify the Ø
- ▶ 材料：铝合金和钢 / Material: aluminium alloy and steel
- ▶ 最大轴荷：750kg / Max. weight on axle tree: 750kg
- ▶ 车轮规格：145 80 R13 / Wheels dimensions: 145 80 R13
- ▶ 支撑脚类型：伸缩型 / "Jockey" wheel type: with collar
- ▶ 信号灯型式：标准平板式 / Road signal: standardised plate
- ▶ 支撑脚承重：4x 800kg / Stands: 4x 800kg
- ▶ 储物箱 / Storage box
- ▶ 轴桥制动方式 / Brake on axle tree
- ▶ 驻车制动 / Park brake
- ▶ 选配：消防炮,出口装备,外廓尺寸,入水口数量
Options: monitor, outlet equipment, dimensions, number of inlets



DELTA 拖车炮 配备 PRIMATOR 消防炮 TRAILER TYPE "DELTA" WITH PRIMATOR

- ▶ 流量：3000 L/min / Flow rate: 3000 lpm
- ▶ 入水口：需要明确直径Ø / Inlet: specify the Ø
- ▶ 材料：铝合金和钢 / Material: aluminium alloy and steel
- ▶ 最大轴荷：500kg / Max. weight on axle tree: 500kg
- ▶ 车轮规格：145 70 R13 / Wheels dimensions: 145 70 R13
- ▶ 支撑脚类型：伸缩型 / «Jockey» wheel type: with collar
- ▶ 信号灯型式：标准平板式 / Road signal: standardised plate
- ▶ 支撑脚承重：4x 200kg / Stands: 4x 200kg
- ▶ 选配：消防炮,出口装备,外廓尺寸,入水口数量
Options: monitor, outlet equipment, dimensions, number of inlets



TANK 2X150L 拖车炮 配备 PRIMATOR 消防炮 TRAILER TYPE "TANK 2X150L" WITH PRIMATOR

- ▶ 流量：3000 升/分 / Flow rate: 3000 lpm
- ▶ 入水口：需要明确直径Ø / Inlet: specify the Ø
- ▶ 箱体材料：聚酯纤维 / Tank material: polyester
- ▶ 材料：铝合金和钢 / Material: aluminium alloy and steel
- ▶ 最大轴荷：500 kg / Max. weight on axle tree: 500 kg
- ▶ 车轮规格：145 70 R13 / Wheels dimensions: 145 70 R13C
- ▶ 支撑脚类型：伸缩型 / "Jockey" wheel type: retractable
- ▶ 信号灯型式：标准平板式 / Road signal: standardised plate
- ▶ 选配：消防炮,出口装备,外廓尺寸,入水口数量
Options: monitor, outlet equipment, dimensions, number of inlets
- ▶ 泡沫箱容量：2x 150 升 / Tank capacity: 2x 150 L
- ▶ 支撑脚承重：4x 200kg / Stands: 4x 200kg

